




- ZTS, Inc. • Cincinnati, OH
- Toll-free: 888-796-2777
- ztsinc.com

MBT-MIL.SF Data Sheet

*Easy to understand
LED display*

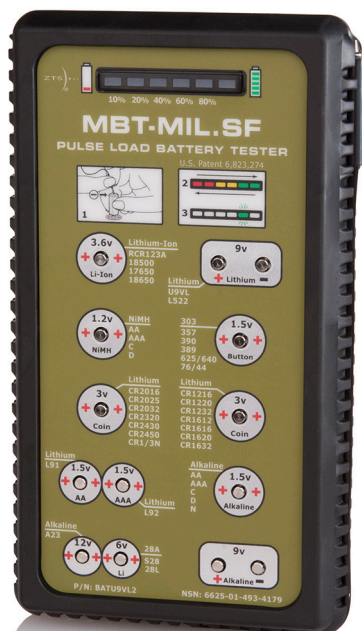

*Simple operation
Test results in
seconds*



Self-storing probe and lead wire

Features

- Computes State of Charge (SOC) for more than 40 battery types
- Easy to use - no switches or settings
- Test battery condition - quickly and easily identifies weak or failing batteries
- Patented high accuracy Pulse Load test - battery safe, non-invasive
- Measures battery performance under load, not just voltage or internal resistance
- Ideal for battery management and cell matching - reduce costs and increase reliability
- Made in U.S.A. Patents 6,823,274 and D569285

Description

The ZTS MBT-MIL.SF provides a comprehensive means of testing the state of charge or state of power for more than 40 battery types, including 9-volt lithium batteries. This microprocessor-controlled instrument is designed for commercial or home use and tests popular primary (non-rechargeable) and rechargeable batteries using a patented, high accuracy pulse load test. After a fully automatic test cycle, percentage of remaining battery capacity is indicated on the LED bar display. Battery types are clearly labeled next to appropriate contacts. The negative test lead/probe conveniently stores in seam at side. It's easy to use, and test results are easy to understand. Tests NiMH, Li-Ion, alkaline, lithium, coin cell, button type and more. Requires 4AA batteries (not included).

Applications

- Electronics
- Rechargeables
- Security
- Industrial
- Medical
- Theater/music
- Scientific
- Access control
- Remotes/wireless
- Inspection
- IT
- Utilities
- Battery management
- Manufacturing
- Safety
- Service

Specifications

P/N: MBT-MIL.SF [BATU9VL2]

NSN: 6625-01-493-4179

Testing capability:

- 3.6v Li-Ion rechargeable [RCR123A, 18500, 17650, 18650] (non-regulated type)
- 1.5v button cell [S76, A76, A625, A640, LR44, 357, 303]
- 1.2v NiMH/NiCd rechargeable [AA, AAA, C, D]
- 1.5v lithium [AA L91, AAA L92]
- 3v lithium coin [1216, 1220, 1232, 1612, 1616, 1620, 1632, 2016, 2025, 2032, 2320, 2430, 2450, 58L,1/3N]
- 6v '28' series [28A, S28, 28L]
- 9v lithium [U9VL, L522]
- 1.5v alkaline [AA, AAA, C, D, N]
- 12v alkaline [A23]
- 9v alkaline, carbon zinc

Power (internal): 4 x AA batteries

Display: 6 LEDs - Green, yellow, and red

Pulse Load: magnitude varies according to battery type

Test duration: 2-3 seconds, varies according to battery type

Contact terminals: nickel-plated brass for high conductivity and durability

Test lead: Flexible, high strand-count 18AWG plastic coated, kinkless lead wire

Dimensions: 8 x 4.5 x 1.25 inches

Weight: 12 oz. / 335g

UPC: 856777000190

Soft Case Accessory

- Designed for the MBT-MIL.SF
- Secure Velcro® flap
- Protects against dirt and impact.
- P/N: SC-MBT1
- UPC: 856777000176



Soft case (tester not included)